

Hushlay 15 Soundmatting is a high performing, unique three layer designed, acoustic floor product, that has been designed to reduce impact noise and contribute to airborne noise reduction through floors.

The make up of the two high performing deadening sheets, sandwiched either side of a frequency tuned resilient layer, helps the product perform to very high levels when reducing impact sound through a floor. The mass in the product that is provided through the deadening sheets is what helps the product also contribute to reducing airborne noise.

When used in the correct applications, Hushlay 15 Soundmatting can be used over any timber and concrete floor structure and when combined with the appropriate ceiling system, will show compliance to all UK Building Regulations for a separating floor.

### ACOUSTIC PERFORMANCE

Impact $L'_{nT,w}$ dB	Airborne $D_{nT,w}$ dB	Airborne $D_{nT,w} + C_{tr}$ dB
47dB	61dB	49dB

Results based on Hushlay 15 Soundmatting being laid over a floor structure, with a suitable ceiling treatment and all flanking paths removed.

### ACCESSORIES

- Hushlay Soundmatting Perimeter Strip: 1200mm long x 25mm wide x 9mm depth
- Hushlay Soundmatting Adhesive: 15ltr tub – coverage up to 45m<sup>2</sup> per tub depending on substrate
- Suitable Hush Timber Sheet (for use with engineered or laminate flooring)
- Hush Hi-Tack Jointing Tape

### SUITABLE FOR



### SPECIFICATION

- (nominal) Size = 1200x1200mm
- (nominal) Thickness = 15mm
- Weight per board: 21.6kg
- Weight = 15kg/m<sup>2</sup>
- A circular saw can be used, if required, for large numbers of straight cuts.

### STORAGE:

- Hushlay 15 Soundmatting must be laid flat and kept dry.
- Hushlay 15 Soundmatting should only be stored on site if the building has been sealed and is completely dry.

### FEATURES

- ✓ Building Regulations Part E (England and Wales), Section 5 (Scotland) and Part G (Northern Ireland)
- ✓ Excellent Impact sound performance levels due to its unique design
- ✓ Improves airborne sound insulation.
- ✓ Easily cut and shaped.
- ✓ Suitable for over timber or concrete floor structures.
- ✓ Can be laid directly under carpet floor finishes
- ✓ Can be used with the Hushlay 15 Soundmatting Perimeter Strips to isolate the carpet grippers from the floor.
- ✓ Can be used under engineered and laminate timber flooring when used in conjunction with the suitable Hush Timber layer.



# BUILDING REGULATIONS

## STATEMENT

- Approved Document E (England & Wales) incorporates a unit of measurement to determine low frequency airborne sound transmission. Due to proven intrinsic difficulties of measuring low frequency sound, in domestic sized rooms, it must be expected that there could be significant deviations in the accuracy of these measurements.
- There will be variations in measurements from site to site in all UK Building Regulations whether it be Document E (England & Wales), Section 5 (Scotland) or Part G (Northern Ireland). These variations are caused by structural differences in buildings, general site conditions and workmanship.
- All these factors can influence the repeatability of both impact and airborne acoustic test results. Therefore, any test results must be considered as an indication only and no warranty can be given or implied as to the actual acoustic performance in any particular situation.

## OVERVIEW

The nuisance of noise is regarded as a health and safety issue for persons living in dwellings and all occupants of a dwelling should be allowed to follow normal domestic activities, including sleep and rest, without threat to their health from noise.

Noise is transmitted in buildings by both airborne and impact sound sources and UK Building Regulations requires that both these noise types are controlled. Practical guidance to meet with Building Regulation requirements is given within Approved Document E.

Sound insulation, in general terms, is the prevention of airborne and impact sound being transmitted from one part of a building to another through separating floors, ceilings or walls.

## AIRBORNE SOUND

Airborne sound sources produce noise by vibrating the surrounding air, for example speech, televisions and home entertainment systems. Airborne sound insulation is concerned with reducing this sound transmission through separating floors and walls.

## IMPACT SOUND

Impact sound sources produce noise by direct physical excitation of a part of a building, for example footsteps on a floor. Impact sound insulation is concerned with resisting this impact sound upon separating floors.

## FLANKING TRANSMISSION

Flanking transmission occurs when sound is transmitted from one space to another indirectly, through adjoining parts of the structure, e.g. impact sound may be transmitted from one room to another through a timber floor, but also through the supporting wall.

Flanking transmission is always a potential problem within any structure, in particular, buildings being converted, and depending on the intensity of the acoustic energy received via flanking transmission paths, the effectiveness of sound insulation of separating partitions can be much lower than expected from their construction.

Careful consideration must be given to the effect of flanking transmission within any building and all potential flanking paths must be identified and eliminated prior to the installation of any sound insulation system.

## APPROVED DOCUMENT E

UK Building Regulations approved Document E 2003 (with subsequent amendments in 2004, 2010, 2013, 2015) incorporates a unit of measurement to determine low frequency airborne sound transmission.

Due to proven intrinsic difficulties of measuring low frequency sound, in domestic sized rooms, it must be expected that there could be significant deviations in the accuracy of these measurements. Furthermore, there will be variations from site to site due to structural differences in buildings, general site conditions and workmanship.

All these factors can influence the repeatability of both impact and airborne acoustic test results. Therefore, any test results must be considered as an indication only and no warranty can be given or implied as to the actual acoustic performance in any particular situation.

## ENGLAND & WALES - NEW APPROVED DOCUMENT E

Building Regulations New Approved Document E came into force on 1st July 2003 (with subsequent amendments in 2004, 2010, 2013, 2015) with the introduction of pre-completion testing (PCT) for sound insulation as a means of demonstrating compliance, and as from 1st July 2004 the use of Robust Details (RD) in new build has been accepted as an alternative to PCT.

Requirements E1, E2 and E3 of Document E apply to the sound insulation of any type of conversion or new build used as a dwelling including; houses, apartments, hostel rooms, hotels, boarding houses, halls of residence and residential homes. Requirement E4 applies to acoustic conditions in schools.

Performance standards are given for each requirement, as follows:

### TABLE 0.1A

Dwelling-houses and flats – performance standards for separating walls, separating floors, and stairs that have a separating function

	Airborne sound insulation $D_{nT,w} + C_w$ dB (Minimum values)	Impact sound insulation $L'_{nT,w}$ dB (Maximum values)
<b>Purpose built dwelling - houses and flats</b>		
Walls	45	-
Floors & Stairs	45	62
<b>Dwelling - houses and flats formed by material change of use</b>		
Walls	43	-
Floors & Stairs	43	64



**HUSH ACOUSTICS**  
Acoustic Material Manufacturers

**HEAD OFFICE CONTACT**

Unit 2, Tinsley Industrial Estate, Shepcote Way, Sheffield, South Yorkshire, S9 1TH  
T: 0114 700 5727 E: info@hushacoustics.co.uk www.hushacoustics.co.uk



## BUILDING REGULATIONS cont.

TABLE 0.1B

Rooms for residential purposes – performance standards for separating walls, separating floors, and stairs that have a separating function.

	Airborne sound insulation $D_{nT,w} + C_{tr}$ dB (Minimum values)	Impact sound insulation $L'_{nT,w}$ dB (Maximum values)
<b>Purpose built dwelling - houses and flats</b>		
Walls	43	-
Floors & Stairs	45	62
<b>Dwelling - houses and flats formed by material change of use</b>		
Walls	43	-
Floors & Stairs	43	64

TABLE 0.2

Laboratory values for new internal walls and floors within dwelling-houses, flats and rooms for residential purposes, whether purpose built or formed by material change of use.

	Airborne sound insulation $R_w$ dB (Minimum values)
Walls	40
Floors & Stairs	40

For further information on Approved Document E visit [www.communities.gov.uk](http://www.communities.gov.uk) or [www.planningportal.gov.uk](http://www.planningportal.gov.uk)

## PCT & ROBUST DETAILS

Pre-completion testing applies to all multi-occupancy, multi-dwelling, or connected-residential material change of use developments. It also applies to all multi-occupancy, multi-dwelling, or connected-residential new build projects not built by means of Robust Details. At least 10 percent of each type of all new residential properties are tested to determine fulfilment of the regulations and pre-completion testing must always be carried out by an accredited acoustic engineer.

Contact with suitable sound testing companies can be arranged through our technical department.

## ROBUST DETAILS

Robust Details are high performance separating wall and floor constructions that are expected to be sufficiently reliable not to need the check provided by PCT. A set of design details which achieve compliance with requirement E1 have been approved by Robust Details Ltd.

Builders intending to use any of these design details must register the project with Robust Details Ltd and follow, to the letter, procedures issued by Robust Details Ltd.

For further information on Robust Details visit [www.robustdetails.com](http://www.robustdetails.com) or contact the Hush Technical division on [info@hushacoustics.co.uk](mailto:info@hushacoustics.co.uk).

## SCOTLAND & NORTHERN IRELAND SCOTTISH BUILDING REGULATIONS SECTION 5

Deals with the reduction of sound through separating building elements between domestic buildings.

	New build and conversions other than traditional buildings	Conversion of traditional buildings*
Minimum airborne sound transmission ( $D_{nT,w}$ ) (Floors & walls)	56dB	53dB
Maximum impact sound transmission ( $L'_{nT,w}$ ) (Floors only)	56dB	58dB

## NORTHERN IRELAND BUILDING REGULATIONS PART G

Northern Ireland Building Regulations Part G, Sound Insulation in Dwellings.

	Airborne sound insulation $D_{nT,w}$ dB (Minimum values)	Impact sound insulation $L'_{nT,w}$ dB (Maximum values)
<b>New build</b>		
Floors	52	61
<b>Conversion</b>		
Floors	48	64

For further information please visit [www.buildingcontrol-ni.com](http://www.buildingcontrol-ni.com)

Should you require further information please visit [www.hushacoustics.co.uk](http://www.hushacoustics.co.uk) or call 0114 750 05727.



**HUSH ACOUSTICS**  
Acoustic Material Manufacturers

**HEAD OFFICE  
CONTACT**

Unit 2, Tinsley Industrial Estate, Shepcote Way, Sheffield, South Yorkshire, S9 1TH  
T: 0114 700 5727 E: [info@hushacoustics.co.uk](mailto:info@hushacoustics.co.uk) [www.hushacoustics.co.uk](http://www.hushacoustics.co.uk)

# HUSH PRODUCT STOCKISTS

For information please call **0114 700 5727** or email **info@hushacoustics.co.uk**

**1 GLASGOW**  
Hamilton International Technology Park,  
4 Bell Dr,  
Blantyre,  
Glasgow  
G72 0FB

**9 BEDFORD**  
Unit 36  
Kenneth Way  
Wilstead Industrial Estate  
Bedford  
MK45 3PD

**11 SOUTH WEST**  
Unit 15 - 16  
Pucklechurch Industrial Estate  
Pucklechurch  
Bristol  
BS16 9QH

**2 NEWCASTLE**  
Unit 1  
Silver Fox Way  
New York Industrial Park  
North Shields  
Newcastle  
NE27 0QH

**10 SOUTH WALES**  
Units 1-3  
Imperial Centre  
Lion Way  
Llansamlet  
Swansea  
SA7 9FY

**12 WEST LONDON**  
Unit 2  
Ashley Road  
Uxbridge Industrial Park  
Uxbridge  
London  
UB8 2GA

**3 WEST YORKSHIRE**  
Unit 5  
Logic Leeds  
Skelton Moor Way  
Halton Leeds  
LS15 0BF

**13 EAST LONDON**  
5 Weston Avenue  
West Thurrock  
Essex  
RM20 3FJ

**4 NORTH WEST**  
Unit M  
Haydock Cross  
Kilbuck Lane  
St Helens  
WA11 9UX


**14 TONBRIDGE**  
Unit 8 & 9  
Cannonbridge Industrial Estate  
Tonbridge  
TN9 1PP

**5 SOUTH YORKSHIRE**  
Unit 2  
Tinsley Industrial Estate  
Shepcote Way  
Sheffield  
S9 1TH

**6 EAST MIDLANDS**  
Unit D  
Long Eaton Industrial Estate  
Acton Close  
Long Eaton  
Nottingham  
NG10 3FZ

**7 WEST BROMWICH**  
Unit 1  
Charles Street  
West Bromwich  
B70 0AZ

**8 MIDLANDS**  
Unit 9  
Maybrook Business Park  
Maybrook Road  
Minworth  
Birmingham  
B76 1AL

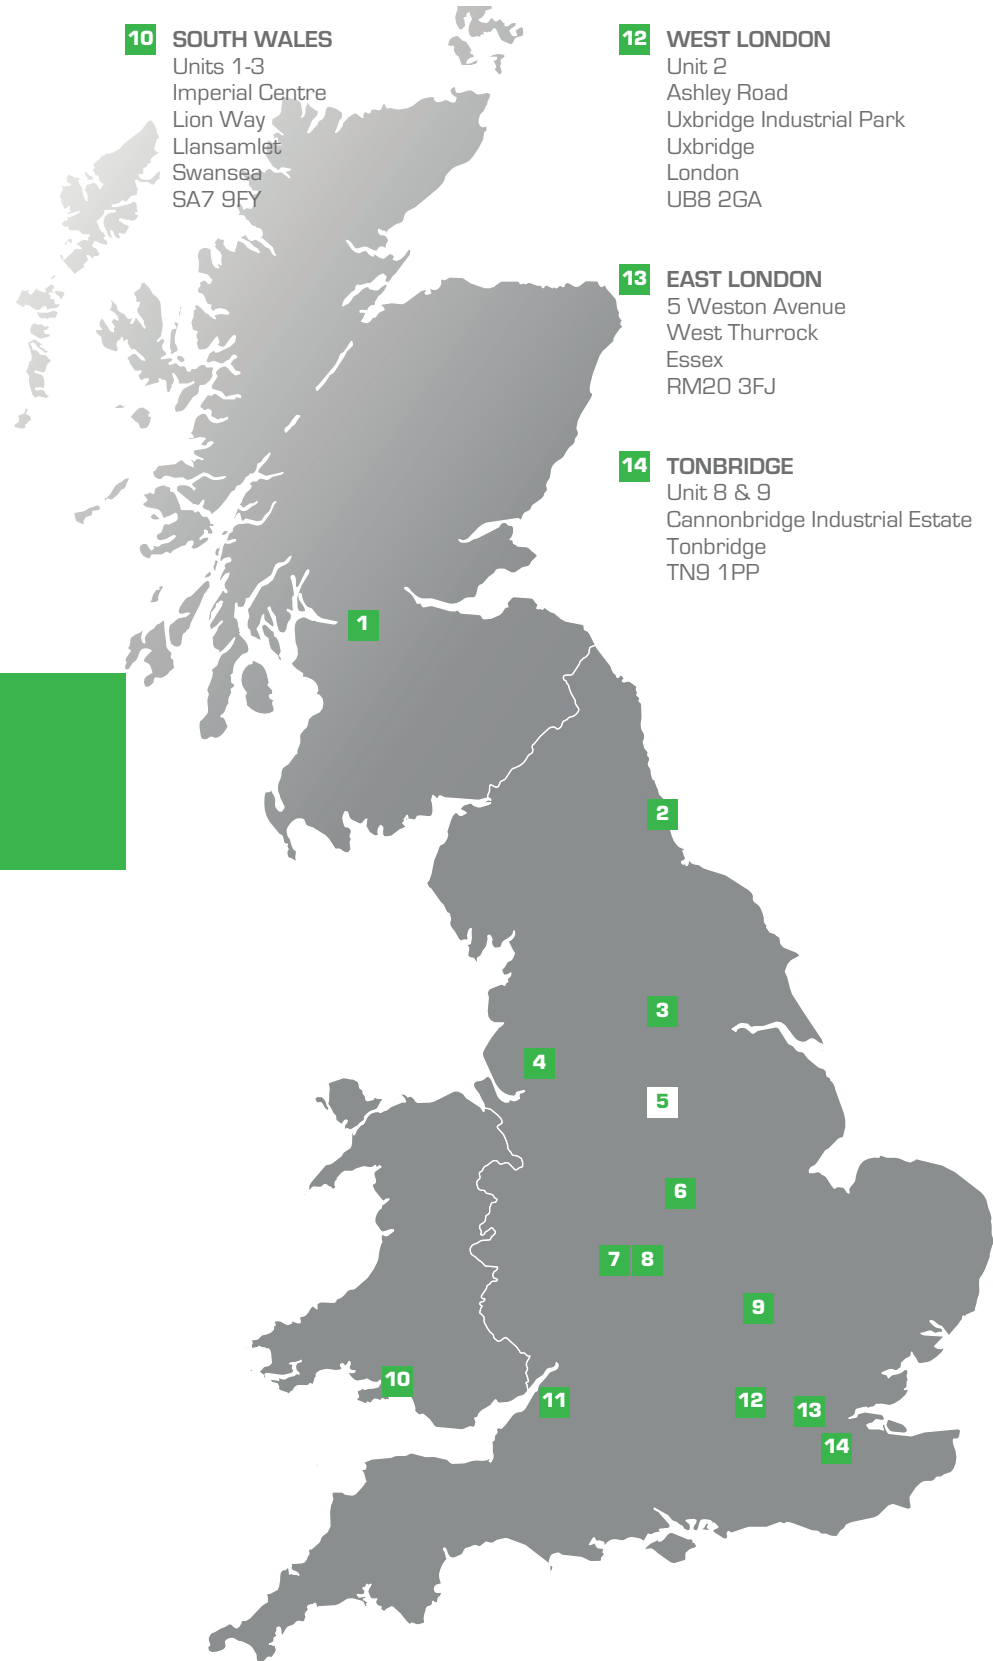

**HUSH ACOUSTICS**  
Acoustic Material Manufacturers

**HEAD OFFICE  
CONTACT**

Unit 2, Tinsley Industrial Estate, Shepcote Way, Sheffield, South Yorkshire, S9 1TH  
T: 0114 700 5727 E: info@hushacoustics.co.uk www.hushacoustics.co.uk